


FA


High Flow Single Filter Cartridge Housing

Design P.	225psi
Design T.	100
Max Operating P.	225psi
Operating T.	75

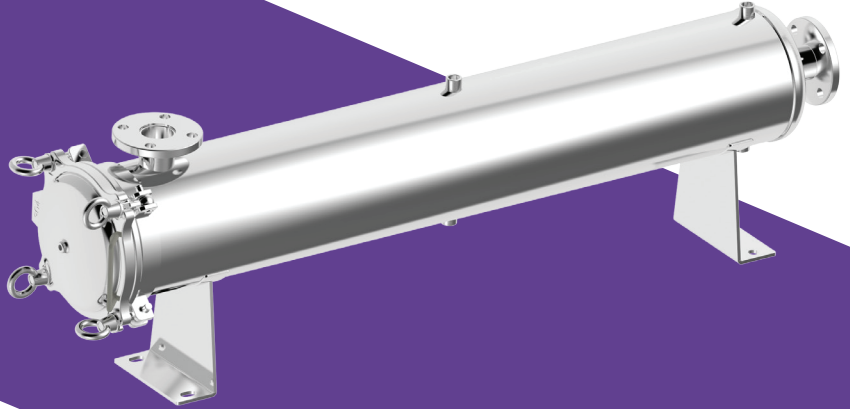


Features

1. Excellent durability and tolerance of high pressure.
2. High Flow type allows high filtration efficiency.
3. Horizontal housing with side-opened top cover design allows easier and safer cartridge change-outs.
3. High-thickness rubber Oring allows for easy installation and resistance of spillage.

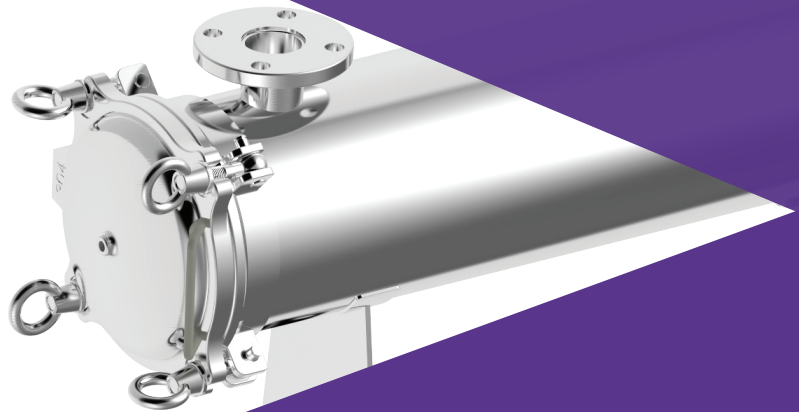



Applications

Chemicals	RO Pre-filtration process
Petrochemical	Water filtration
Beverage Industry	Pharmaceutical
Liquor manufacture	Experiment Process
Food industry	Gas Filter
Electroplating Industry	Sewage treatment
High temperature manufacturing processes	Electronic Industry

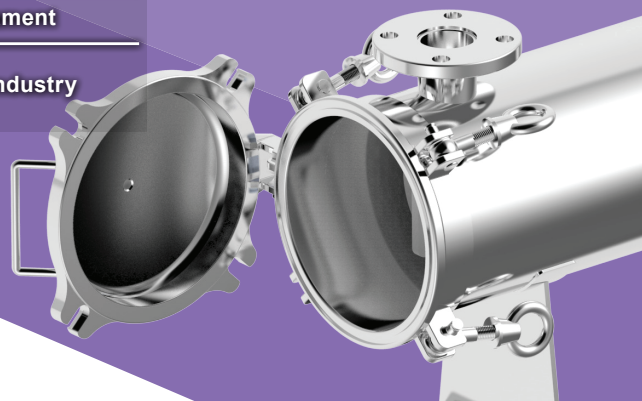

FA Ordering Guide

FA	1	4	3H	2	10K	E	EA
Model	Length	Material	Adapter	Connection Size	Connection Type	O-ring	Outside / Inside Finishes
FA	4-40" 6-60"	4-304 6-316 6L-316L	3H-3M High flow 37-3M 700 PM-Pall Max	21-1/2" 43-3/4" 1-1" 121-1-1/2" 2-2" 221-2-1/2" 3-3"	150P-ANSI 10K-JIS PN10-DIN C-CLAMP PF-PTF NF-NPTF PM-PTM NM-NPTM	E-EPDM N-NBR V-VITON S-Silicon T-Teflon +Silicon	A-ACID-Pickling E- Eletropolishing P-Polishing S-Sand Blasting

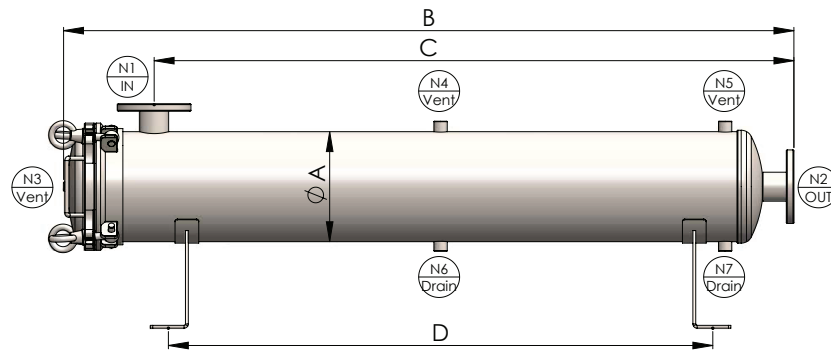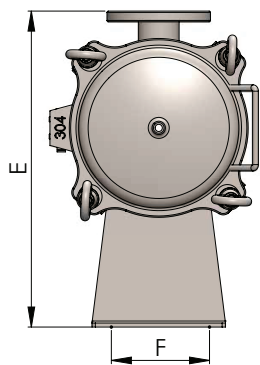

FA Specifications

Model	Length	A m/m	B m/m	C m/m	D m/m	E m/m	F m/m	M3/Hr	Weight
1FA	40"	Ø232	1349	1540	1120	476	160	94	50kg
1FA	60"	Ø232	2150	1959	1730	476	160	140	57kg