

VUF-2880T

Hollow Fiber UF Membrane Element VUF Series

Product Presentation

Hollow fiber UF membrane elements are mainly used for removing suspended solid, colloidal and bacteria in water solution, and are widely used in tap water purification, seawater desalination pretreatment and wastewater recycle purification.

Application

Tap water purification;
Desalination pre-treatment;
Wastewater reuse purification.

Model	Active Membrane Area m ²	System Flux LMH	Nominal Aperture μm	Membrane Filament Material	Manufacturing Technique
VUF-2880T	77	35-120	0.08	PVDF	TIPS


Operating Conditions & Limits

Maximum feed pressure	0.60 MPa
Maximum backwash TMP	0.25 MPa
Maximum temperature	40°C
Maximum filtration TMP	0.30 MPa
Allowed pH range for feedwater in operation	2-11

Product Size: 1.0 (inch) =25.4 mm

Important information

- Pay attention to the regular maintenance of ultrafiltration membrane equipment, all pumps, valves, meters and other regular calibration.
- Regular inspection, observe whether there is any abnormal situation, pay attention to the liquid level of the chemical tank, when the liquid level is too low, replenish the drug in time.
- Record the ultrafiltration membrane inlet pressure, concentrated water pressure, produced water pressure, produced water flow, turbidity and other parameters.
- At all times must keep the ultrafiltration membrane in a wet state, once the dehydration becomes dry, will cause irreversible damage to the membrane module. The membrane module will be irreversibly damaged if dehydrated and dried out.
- Electrical operation must be performed by trained and certified personnel.
- On-site operation should wear good working clothes and all protective equipment, pay attention to safety.
- The whole ultrafiltration membrane equipment in normal operation, failure, please check the cause in time, such as the system leakage and other minor faults, please overhaul in time. If there is an emergency failure, please contact the original manufacturer immediately.

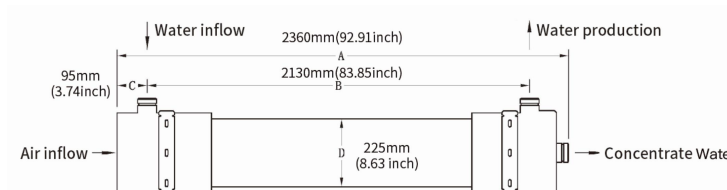

Product performance may vary under different conditions, and the information in this document is for reference only and is not to be relied upon as a guarantee of performance in actual applications. It is the responsibility of the user to determine whether the products and information in this document are suitable for the settings in which they are used and to ensure that the products are used in a manner consistent with applicable laws and regulations. Vontron assumes no obligation or responsibility for the information in this document and is not responsible for any consequences arising from the use and maintenance of the products by the user not in accordance with the conditions provided in this sample. Due to technical progress and product replacement, product information may change at any time without prior notice. Please pay attention to the latest product information.