


RL4

RO Membrane Housing

Design P.	300psi
Design T.	100
Max Operating P.	300psi
Operating T.	75

Features

1. PVC and Stainless material of top&bottom cover meets your requirement and budget
2. Efficient filtering with High flow velocity
3. Tightly seal of top&bottom cover and shell.

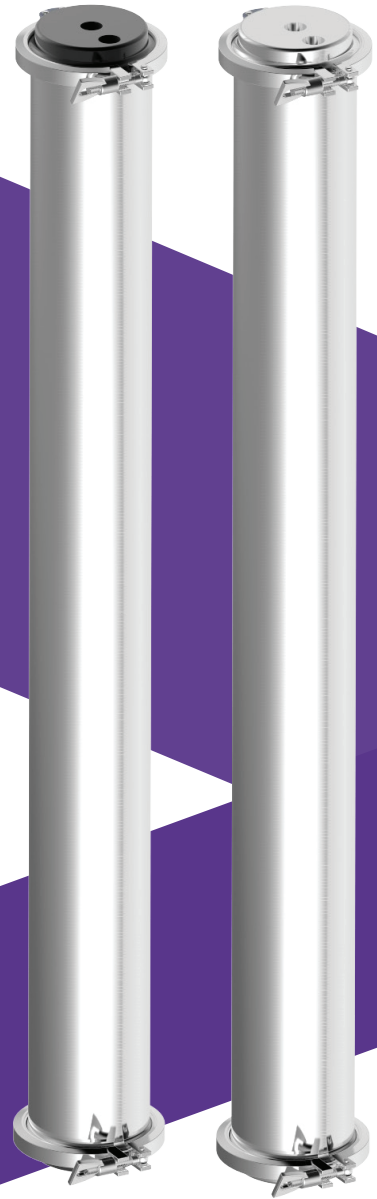



Applications

Chemicals	RO Pre-filtration process
Petrochemical	Water filtration
Beverage Industry	Pharmaceutical
Liquor manufacture	Experiment Process
Food industry	Gas Filter
Electroplating Industry	Sewage treatment
High temperature manufacturing processes	Electronic Industry



RL4 Ordering Guide

RL4	4	B	4	N	21	PF	21	PF	N	BA
Model	Length	Clamp Type	Shell Material	Ro Head Material	N1 Size	N1 Type	N2 Size	N2 Type	O-ring	Outside / Inside Finishes
R2	2-21"	A-One Piece Casted Clamp type	4-304	4-304	21-1/2"	PF-PTF	21-1/2"	PF-PTF	E-EPDM	B-Burnishing
R4	4-40"	B-Two Piece Clamp type	6-316	6-316	43-3/4"	NF-NPTF	43-3/4"	NF-NPTF	N-NBR	A-Acid pickling
	8-80"									
	12-120"									
				N-Nylon					V-VITON	P-Polishing

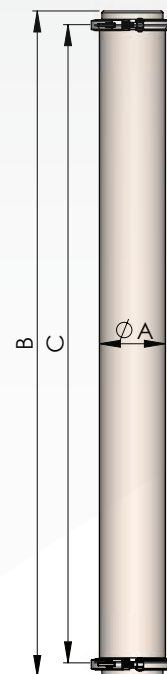

RL4 Specifications

Model	A m/m	B m/m	C m/m	N1	N2	Weight
RL4-2	Ø106	539	545	1/2" or 3/4"	1/2" or 3/4"	6kg
RL4-4	Ø106	1073	1025	1/2" or 3/4"	1/2" or 3/4"	8.5kg
RL4-8	Ø106	2088	2040	1/2" or 3/4"	1/2" or 3/4"	13kg
RL4-12	Ø106	3103	3055	1/2" or 3/4"	1/2" or 3/4"	18kg